

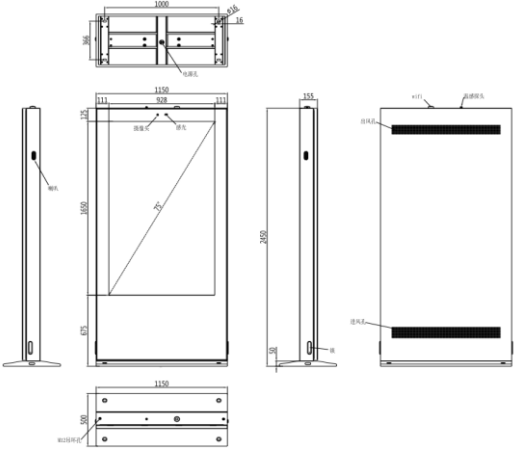

	<b>Shenzhen Yaxunda lcd led display equipment Co.,Ltd</b> info@asianda.com    Whatsapp: +86-13417590543
Model: YXD75S-DWP	
<b>75inch Floor Stand Outdoor Digma Signage</b>	
<b>Picture</b>	
<b>Color Size</b>	<b>Black / Gray / cutomzied color</b> <b>2450*1150*155/ L * W* T (mm)</b>
<b>Applicaion</b>	
	
<b>Features</b>	<p><b>Structure:</b></p> <p>The outer shell is made of 1.5mm SGCC galvanized steel sheet, sprayed with powder in Akzo outdoor powder, anti-corrosion more than 7 years ;  The shell structure is designed with a waterproof groove and a waterproof labyrinth of air inlet and outlet holes, which meets the ip65 protection level;  Dust-proof design: The air inlet and outlet are specially designed with medium and high-efficiency dust-proof filters, which could filter dust in the air and prevent mosquitoes from entering the inside of the machine. The easy disassembly and assembly design facilitates regular maintenance by customers.  The protective glass in front of the screen of the whole machine adopts 6mm AR glass, with light transmittance <math>\geq 97\%</math>, high light transmittance and anti-reflection. The whole machine adopts the front and rear door opening method, which can facilitate the maintenance of the internal display screen, heat dissipation components and electronic parts.  The whole machine adopts modular design, which is convenient for installation and maintenance.</p> <p><b>Screen:</b></p> <p>Using high-brightness LCD with brightness 2500-3000cd/m<sup>2</sup>;  High-resolution, high-contrast, high-brightness, greatly improved picture sense;  It has the function of automatically eliminating residual image, anti-ultraviolet, heat insulation against sunlight, and automatic light-sensing green energy saving to protect the long-term use of the LCD screen.  It has the function of black level extension and self-adaptation, which enhances the sense of depth of the image;  With outdoor professional high-bright LCD screen, the video image is brighter;  16.7M colors, the picture is more natural, and the delicate picture is truly without tailing.  Long life, 7*24 hours of uninterrupted work, up to 50,000 hours</p> <p><b>Electric:</b></p> <p>Electrical protection: leakage, overload, overvoltage protection, lightning protection device, over temperature protection, water leakage protection, etc;  Audio: Using dual-channel, stereo surround amplifier system, output power 8 ohm 10W;  Standard working environment temperature design: +60°~ -20°;  Adopting modular design principles, sustainable and maintainable design;  Automatic light sensitivity adjustment: The screen backlight adopts automatic ambient light sensing, real-time adjustment of the screen brightness can meet the clear image display under strong direct sunlight environment, and make the screen not dazzling at night, which is energy saving and environmental protection;  Heat dissipation:  Adopt integrated intelligent direct ventilation cooling system, professional and special air duct cooling design;  The internal air and external air of the whole machine are circulated and exchanged. After the outside air enters the dust filter and filtered, it is divided into two air circulations before and after the screen to ensure that the internal temperature reaches a temperature difference of 8-10 degrees from the external temperature;  Independently developed fan speed control board, which can automatically adjust the fan speed according to the internal temperature of the machine;  <b>Equipped with high-temperature automatic power-off protection function. When the internal temperature of the machine is abnormally high and exceeds the normal working range, the control system will power off the main</b></p>
<b>Spfication</b>	

<b>Screen</b>	LCD: 75inch TFT panel Screen Ratio: 16:9 Display Area:1650*8928 Pixel Pitch: 0.63*0.63 Response Time: 6ms Resolution: 3840x2160 Contrast:3500:1 View Angle: H/V:178° Backlight: LED Backlight Brightness:2500cd/m2	
<b>Motherboard (Android)</b>	MOTHERBOARD: RK3568 Ghz Ram: 2 GB BUILT-IN STORAGE: EMMC 16G Operating System: Android11.0	
<b>Interfaces</b>		
<b>Heat Dissipation</b>	Air Cooling System	Low temperature self-starting heating module
		The temperature of self-checking probe can control the rotation speed of the fan to save energy and prolong the lifetime of the fan
		Intelligent temperature sensing system, high temperature automatically turn off the display
<b>Electric Control</b>	Timer	Can Be set by day, week, month to custom switch machine
	Leakage Protector	When the leakage current is over 30MA, the circuit should be disconnected to protect the human body
	Lightning arrester	Self-check outdoor lightning strike 40kA surge current, play a 3-level lightning protection effect, to protect the safety of equipment
	Switch power supply	Using industrial-grade power supply, 365 days stable throughout the year, continuous voltage output
	Smoke Sensor (Option)	Smoke sense and alarm
	Vibration sensor (Option)	Check machine operation situation. If overpass the vibration value means machine has some problems.
	Open Door Sensor (Option)	Open door alarm, early warning through background signal to improve machine safety
	Water Level Sensor (Option)	It can detect water leakage in the interior, and provide early warning through the background signal to improve the safety of the machine.
Waterproof Speaker	Waterproof high-quality, 10w speakers, realistic sound quality, stereo sound	
<b>Accessories</b>	Manual, remote control, warranty card, certificate, power cord	
<b>Structure</b>	Product Structure	1.5 mm galvanized sheet, sprayed in Akzo outdoors powder, outdoor anti-corrosion for more than 7 years
	Dust Proof Design	The T shell structure is designed with a waterproof groove and a waterproof labyrinth of air inlet and outlet holes, which meets the ip55 protection level
	Anti theft Design	The base/frame is designed with an internal lock to prevent the machine from being moved to remove the screws from the outside, which is truly safe and anti-theft
	Waterproof Design	Special dust-proof filters (medium and high-efficiency dust-proof filters) are used at the inlet and outlet to filter micro dust to avoid mosquitoes entering the machine.
	Installation	Floor Stand
	Protection Glass	high transmittance rate, 6mm high permeability tempered glass or anti-glare tempered glass, light transmittance ≥97%
	Weight	350kg
	Product Size	2450*1150*155 (mm)
	Package Size	2358*1215*390 (mm)
<b>Work</b>	Noise	< 65dB
	Protection Grade	IP55
	Storage Temperature	-10°C ~ 60°C
	Work Environment	Work Temperature: -20 °c ~ + 60 °c ; Work Humidity: 5% ~ 90%
	Power Supply	AC110~240V 60HZ
	Power	≤1200W